




Multipurpose Brushcutters

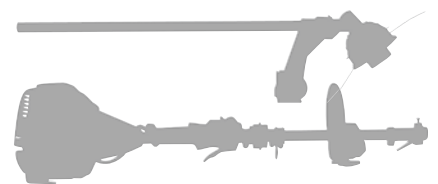

   technology made in Italy

Multipurpose Brushcutters

product's details

ENGINE CRANKSHAFT - PISTON



The two pieces crankshafts with two counterweights are made of high quality steel. The special design reduces vibrations and guarantees high performances. Piston - Ultra light pistons are used to reduce vibrations. All pistons made of special cast iron have two pistons rings to ensure a longer life of the engine.

CLUTCH



All ACTIVE brushcutters (except models 2.5 and 2.9) are equipped with an heavy duty 78 mm clutch with two shoes. The large clutch ensures a longer life and guarantees all power to be transferred to the cutting device.

SHOCK ABSORBER



To reduce vibrations, shock absorbers have been positioned between the engine and the transmission.

AIR FILTER



Double stage air filters. These filters guarantee longer engines life and lower maintenance costs. A paper filter kit (ideal for very dusty conditions) is available, as an option, for 4.5 - 5.5 - 6.5 engines.

DECOMPRESSOR



Some models are equipped with a decompressor to guarantee an easy start with very low effort. This device eliminates the kick back and ensure a longer life of starter components.

DIGITAL IGNITION



The digital ignitions have been specifically developed by ACTIVE to offer better performances. The digital ignition guarantees an easier start of the engine in any condition, a cleaner engine and lower emissions.

CARBURETTOR



Walbro WYK diaphragm carburettors with primer are used on all engines. Diaphragms are made of a special material (Mylar) used to guarantee good and long performances even using unleaded fuel with high percentage of alcohol and/or alkyl fuels.

MUFFLER



The special material (thickness 1,0 mm), used in manufacturing the muffler, reduces the noise emissions. The Active technology used in producing this component guarantees a longer life of the muffler due to reduced wear (caused by hot temperatures and oil).

FUEL TANK



A larger cap on the gasoline tank makes easy the filling operation. All pipes are manufactured in Viton, special material resisting to unleaded fuel corrosion and high temperatures. Special device to avoid Vapor-Lock.



TRANSMISSION



Transmissions made of special material, light but heavy duty. Transmissions shafts have 6 self-lubricating bushings to reduce vibrations. All these features guarantee the maximum comfort to the operator.

GEARBOX



Reliable heavy duty gearboxes designed to resist to the most severe working conditions.




HANDLE

ROTOFIX



The handle on multifunction models has the patented "Rotofix" system. The "all in one" handle allows the operator to always have the unit in control in any working condition. Model EVO 2.5 and EVO 2.9 are not equipped with the patented "Rotofix" system.

QUICK FIT SYSTEM



Quick fit system allows an easy change of the attachments. A safety pin guarantees extra safety. Thanks to the ACTIVE "Quick Fit System" in few seconds an multipurpose unit can be used as a brushcutter or as a pruner or as an hedge trimmer.

HARNESSES - NYLON HEADS




Have been designed to guarantee to the operator the maximum comfort and safety. All brushcutters fit the patented ACTIVE nylon heads and PLATINO line.

Multipurpose Brushcutters

Evolution

shaft \varnothing 26 mm

A large range of split shaft models is available. These models have been especially designed for easy transportation (i.e. in the trunk of the car). A wide variety of attachments can be fitted to these models for various purposes. These attachments can be purchased separately when needed.

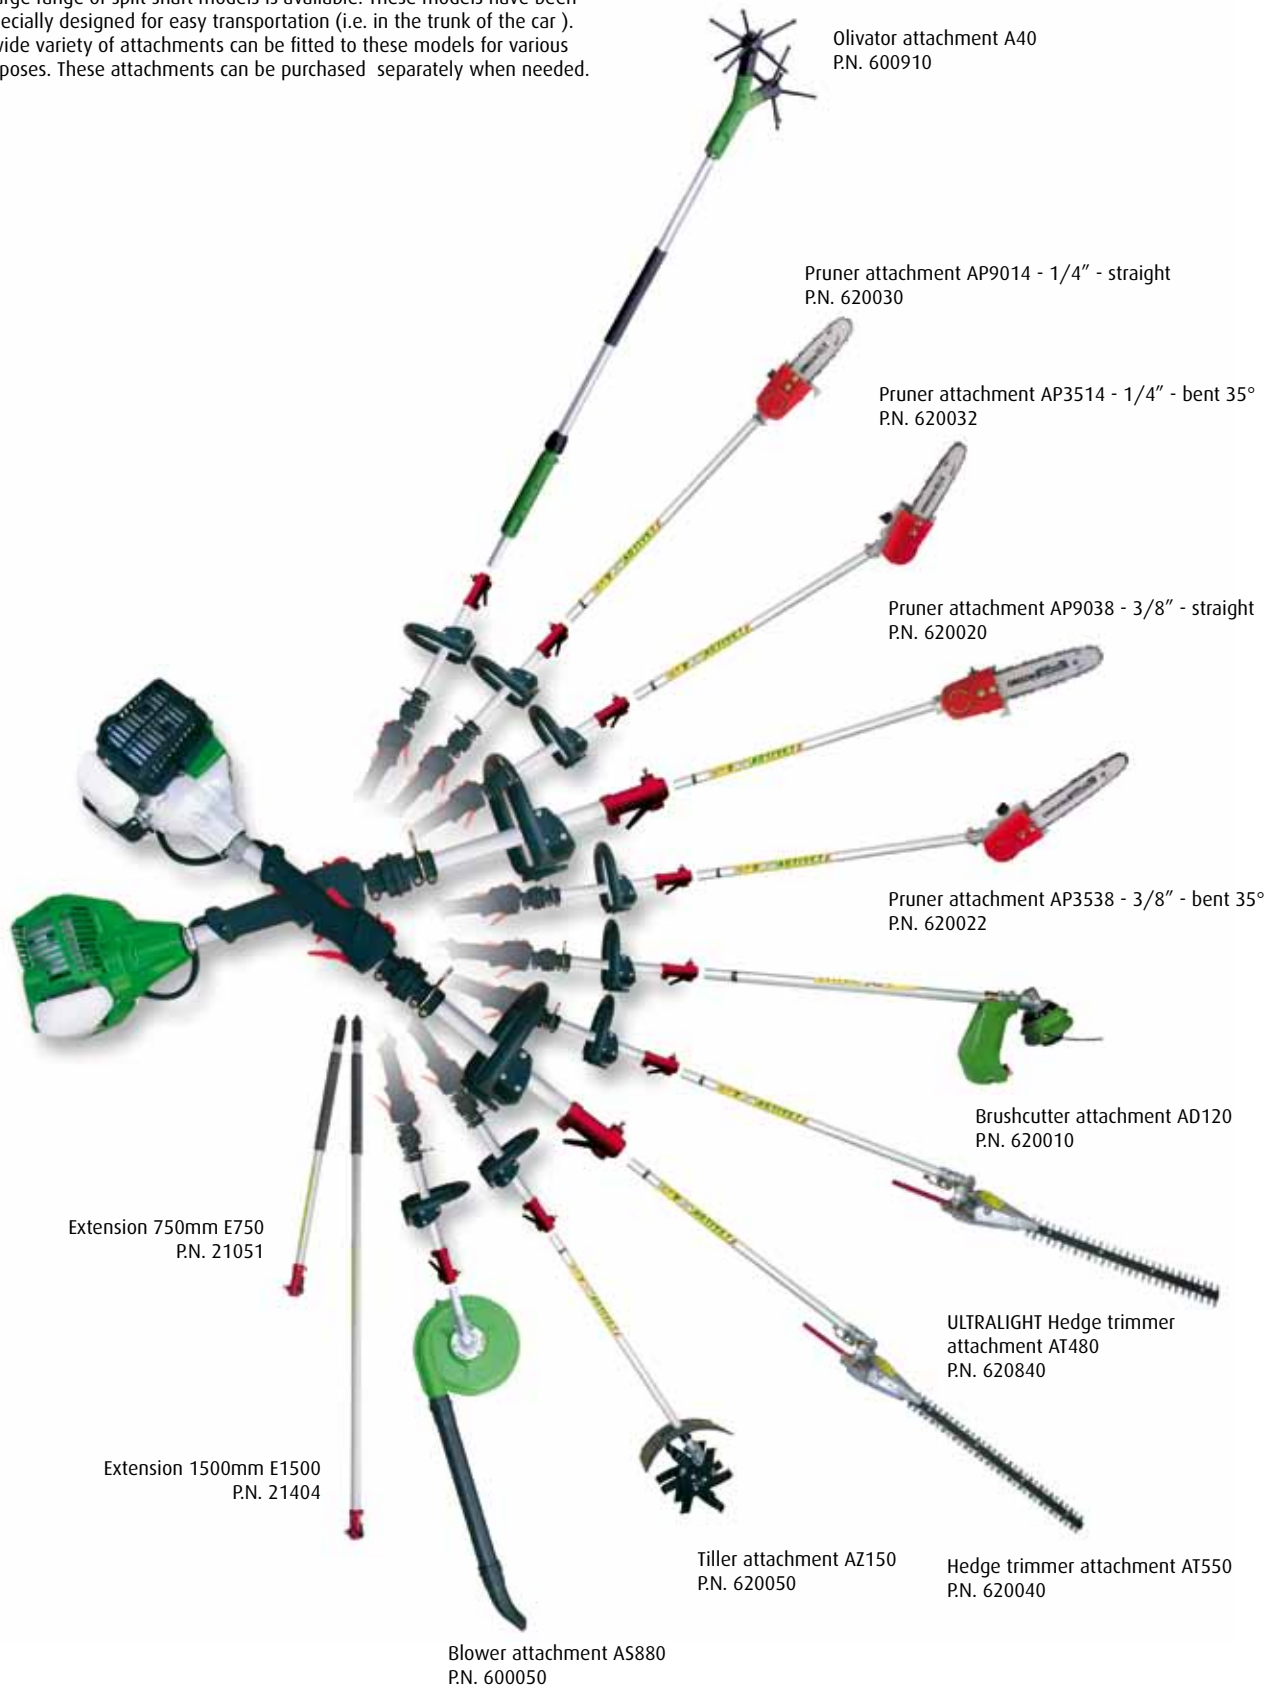

Multipurpose Brushcutters


Evolution

MOD. Evolution 2.5 - 2.9 - shaft ø 26 mm



Model	Code	Displacement cc	Power Hp/Kw	Carburettor diaphragm type Walbro	Air filter	Clutch ø mm	Fuel tank capacity lt.	Oil tank capacity lt.	Weight kg	Equipment	Price
Evolution 2.5	25EV04	24.5	1.4/1.03	WYC	Single	54	0.5	-	5.3	Nylon head 120 "Tap and Go" 10x1.25 SX F	
Evolution 2.9	29EV04	28.5	1.7/1.25	WYC	Single	54	0.5	-	5.3	Ergonomic single strap harness Easy	

MOD. Evolution 2.6 - 3.4 - shaft ø 26 mm

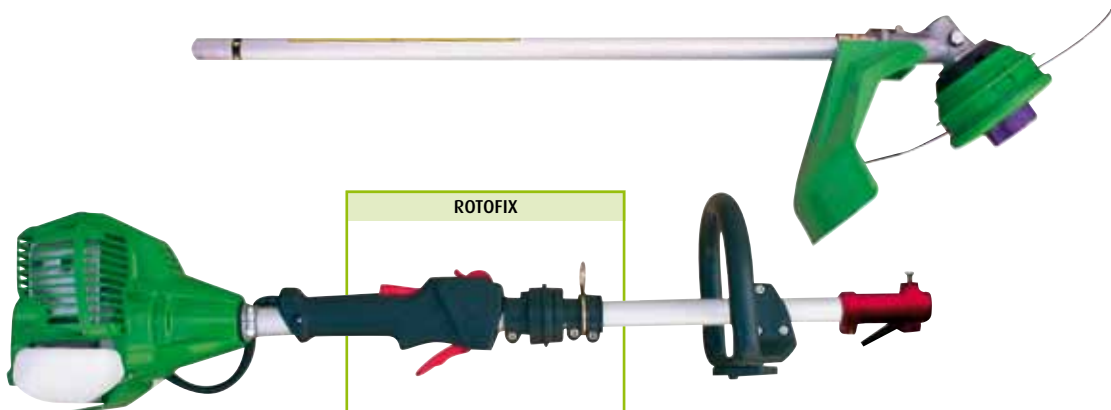


Model	Code	Displacement cc	Power Hp/Kw	Carburettor diaphragm type Walbro	Air filter	Clutch ø mm	Fuel tank capacity lt.	Oil tank capacity lt.	Weight kg	Equipment	Price
Evolution 2.6	262604	26.0	1.5/1.1	WYK	Single	78	0.6	-	6.5	Nylon head 120 "Tap and Go" 10x1.25 SX F	
Evolution 3.4	343404	29.0	1.9/1.4	WYK	Single	78	0.6	-	6.6	Ergonomic single strap harness Easy	

Multipurpose Brushcutters

Evolution

MOD. Evolution 3.5 - 4.0 - shaft ø 26 mm

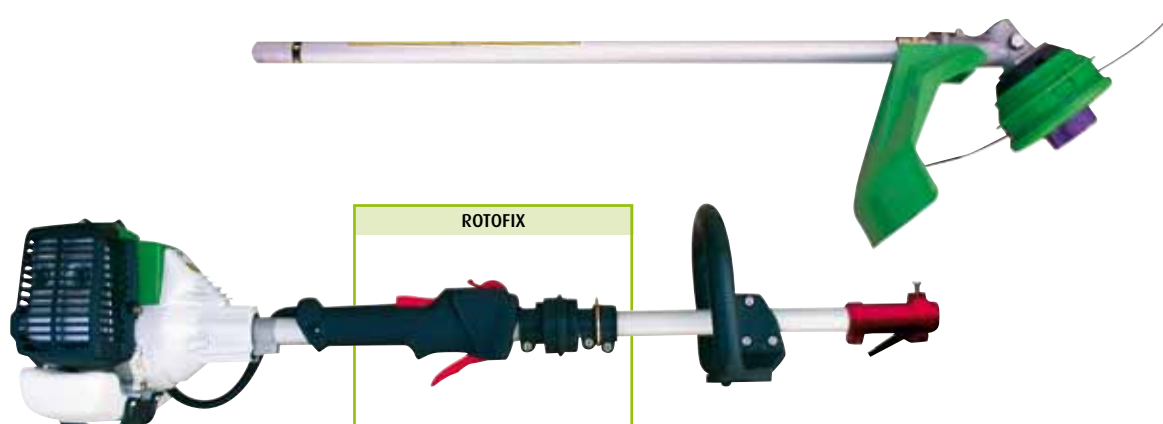

Model	Code	Displacement cc	Power Hp/Kw	Carburettor diaphragm type Walbro	Air filter	Clutch ø mm	Fuel tank capacity lt.	Oil tank capacity lt.	Weight kg	Equipment	Price
Evolution 3.5	353504	35.0	2.0/1.47	WYK	Single	78	0.8	-	6.7	Nylon head 120 "Tap and Go" 10x1.25 SX F	
Evolution 4.0	404004	38.0	2.3/1.7	WYK	Single	78	0.8	-	6.7	Ergonomic single strap harness Easy Professional blade	

26

MOD. Evolution 4.5 - 5.4 - shaft ø 26 mm



Model	Code	Displacement cc	Power Cv/kW	Carburettor diaphragm type Walbro	Air filter	Clutch ø mm	Fuel tank capacity lt.	Oil tank capacity lt.	Weight kg	Equipment	Price
Evolution 4.5	454504	42.7	2.6/1.9	WYK	Double	78	1.1	-	7.7	Nylon head 120 "Tap and Go" 10x1.25 SX F	
Evolution 5.4	545404	51.7	3.0/2.2	WYK	Double	78	1.1	-	7.7	Ergonomic single strap harness Easy Professional blade	

Multipurpose Brushcutters

Evolution and Viper

MOD. Evolution 2.5 - 3.5 4 stroke engine - shaft ø 26 mm



Model	Code	Displacement cc	Power Hp/Kw	Carburettor diaphragm type Walbro	Air filter	Clutch ø mm	Fuel tank capacity lt.	Oil tank capacity lt.	Weight kg	Equipment	Price
Evolution 2.5 4T	254T25	24.5	1.1/0.8	WYL	Single	54	0.5	0.08	6.0	Nylon head 120 "Tap and Go" 10x1.25 SX F	
Evolution 3.5 4T	354T35	33.5	1.6/1.18	WYL	Double	78	0.65	0.1	7.0	Ergonomic single strap harness Easy	

All Evolution* and Viper models are equipped with the unique "Rotofix" handle system

ROTOFIX®


The patented Rotofix handle system allows the operator to lock the handle in the desired position. This device guarantees high comfort and safety in using any attachment.

* not available on models 2.5 Evo e 2.9 Evo



27

MOD. Viper 3.4 - 4.0 - shaft ø 26 mm

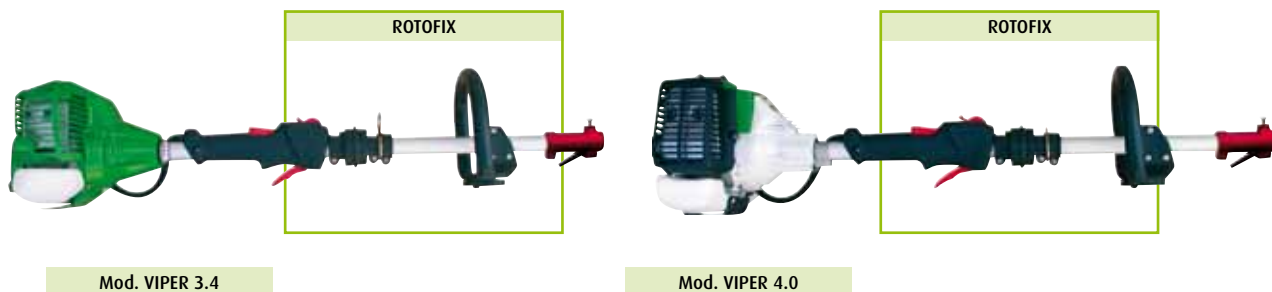

Mod. VIPER 3.4

Mod. VIPER 4.0

* No brushcutter attachment supplied with 3.4 - 4.0 Viper models

Model	Code	Displacement cc	Power Hp/Kw	Carburettor diaphragm type Walbro	Air filter	Clutch ø mm	Fuel tank capacity lt.	Oil tank capacity lt.	Weight kg	Equipment	Price
Viper 3.4 only engine	620001*	29.0	1.9/1.4	WYK	Single	78	0.6	-	5.6	Ergonomic single strap harness Easy	
Viper 4.0 only engine	624001*	38.0	2.3/1.7	WYK	Single	78	0.8	-	6.0		

Attachments

for Evolution and Viper brushcutters

OLIVATOR

4:1 R.P.M. reduction
couple limiter



Model	Code	Price
A40	600910	

BRUSHCUTTER



Model	Code	Price
AD120	620010	

STRAIGHT PRUNER



Model	Code	Chain	Bar mm / inches	Price
AP9038	620020	3/8" LP	254 / 10"	
AP9014	620030	1/4"	203 / 8"	

BENT PRUNER




Model	Code	Chain	Bar mm / inches	Price
AP3538	620022	3/8" LP	254 / 10"	
AP3514	620032	1/4"	203 / 8"	

HEDGE TRIMMER



Model	Code	Blade mm / inches	Price
AT550	620040	550 / 22"	
AT480 ULTRALIGHT	620840	480 / 19"	

TILLER

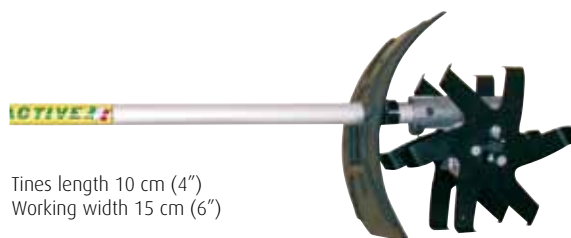

Tines length 10 cm (4")
Working width 15 cm (6")

Model	Code	Price
AZ150	620050	

BLOWER



Air flow max. 880 cubic meters/hour
Max air speed 89 meters/second

Model	Code	Price
AS880	600050	

EXTENSIONS



Model	Code	Length mm / inches	Price
E750	21051	750 / 29"	
E1500	21404	1500 / 59"	